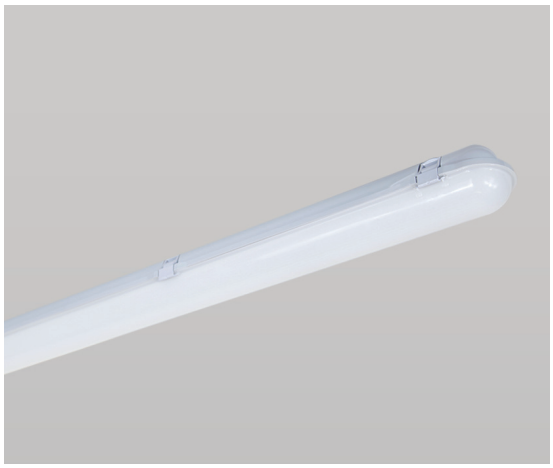

HALIC

GCP 1236WK SG60





Product Features and Key Data

Applications :	Warehouse - storage area - parking area - loading area - industiral area
Luminaire Type :	LED waterproof luminaire
Mounting Method :	Surface or suspension
Luminaire Optic :	PC diffuser
Connected Load :	36W
Colour Temprature :	6000K
Rated Luminous Flux :	3600 lm
Luminous Efficiency :	100 lm/W
Power Factor :	> 0,973
CRI Value :	> 80
UGR :	< 21 (EN124664-1)
Photo Biological Class :	Group 0 - No risk
Luminaire Colour :	Grey Color
Luminaire Body :	Polycarbon body polycarbon glass.
Electrical version :	With electronic transformer, switchable.
Connection method :	Terminal
Mains frequency :	50/60 Hz
Mains voltage :	220 - 240 V
Led Service (25°) :	L80 = 50.000 h
Driver (220 - 240V) :	Tridonic, Osram, Gecem
Ceiling Type :	AB - Gypsum Ceiling TB - Modular Ceiling KB - Clip-in Ceiling
Ingress Protection (IP) rating :	IP65
Protection class :	I
Impact resistance (IK) :	IK08
Hot wire resistance :	650 °C
Ambient temperature :	-35 - 55 °C
Options :	1 - 3 Hours Emergency Kit, Dali Dimmible
Accesories :	Suspension Kit, Sensor

All technical data including details of weight and dimensions have been complied with due care. Errors excepted. Product illustrations serve as examples and may differ from the original. We reserve the right to make alterations in the interest of improving our products.